


**ACCESSORIES**

- " V " arm door closer
- Slide arm door closer  
A>1000 mm B>1000 mm
- Door closer with integrated mechanical door coordinator
- Door selector
- Couple of handle on round rose and lock profile
- Standard Lever Panic Bar
- Standard Lever Panic Bar on secondary leaf
- Push-bar
- Push-bar on secondary leaf
- Electrical handle
- RAL .....

LVM= Structural opening width  
 HVM=Structural opening height  
 LVP = Frame Passage Width  
 HVP = Frame Passage Height  
 LPa = Leaf Passage width  
 LPm\* = Panic bar passage width  
 LPma\* = Panic bar leaf passage width

- LPma\*  Standard Lever = A-263 ..... ( ) mm.
- Push-Bar= A-226.....( ) mm.
- LPm\*  Standard Lever = LVM-496 .....( ) mm.
- Push-Bar = LVM-426 ..... ( ) mm.

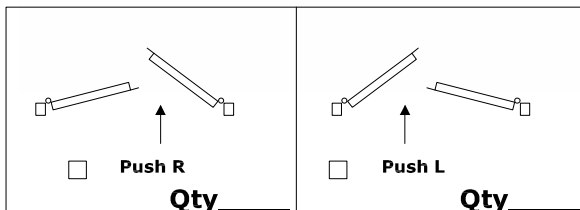

- EI 30 glass (External use)
- EI 60 glass (External use)

H Mid-Frame = \_\_\_\_\_ mm.

Dimensions mm.

LVM \_\_\_\_\_ x HVM \_\_\_\_\_

LVM = A+B

A= \_\_\_\_\_ B = \_\_\_\_\_

In case of fanlight please specify the full height passage (HPT)

HPT = \_\_\_\_\_



Fael Security Srl  
 Via E. Majorana  
 72100 Brindisi - ITALIA  
 Tel. 0831-546563 Fax 0831-546674  
 E-mail: fael@fael.com  
 Web: http://www.fael.com

*VITRALIGHT*

EI 30/60 ALUMINIUM OPENABLE  
 GLAZED FIREDOOR  
 (External use)  
 ASYMMETRICS TWO LEAVES

Client: \_\_\_\_\_

Order n° \_\_\_\_\_ date \_\_\_\_\_

Ref. : \_\_\_\_\_

Stamp and Signature

Date: \_\_\_\_\_